



*MODEL A-SLJ-4
FORMED ADJUSTABLE LOUVER
STRAIGHT BLADE*

Standard Construction:

Frame: 4" (101 mm) x 20 ga. galvanized steel.

Blades: 20 ga. galvanized steel,
approximately 4-3/8" (111 mm) on centers.

Blade Angle: 45°

Bearings: Permanently lubricated oilite bronze,
press fit into frame.

Axles: 1/2" (12.7 mm) dia. plated steel.

Linkage: Plated steel concealed in jamb.

Operator: Wing nut slide bracket.

Screen: Bird screen - 1/2" x 1/2" (12.7 mm x 12.7 mm) x 19 ga.
galvanized steel, in a removable frame on interior of louver.

Finish: Mill galvanized.

Minimum Size: 12"w x 12"h (25.4 mm x 25.4 mm)

Maximum Section Size: 48"w x 72"h (1219 mm x 1829 mm) with Jamb Seal
48"w x 96"h (1219 mm x 2438 mm) without Jamb Seal

Options:

Screens: Insect screen - 18 x 16 mesh aluminum.
Other: _____

Blade Seals: Extruded vinyl

Jamb Seals: Flexible stainless steel

Finish: Prime Coat.

Baked Enamel.




Other: _____

Sill Extensions:

Flange: 1-1/2" (38 mm) (front or rear)

Other Operator - _____

Notes: Louvers fabricated 1/4" (6.4 mm) under
opening size unless otherwise noted.

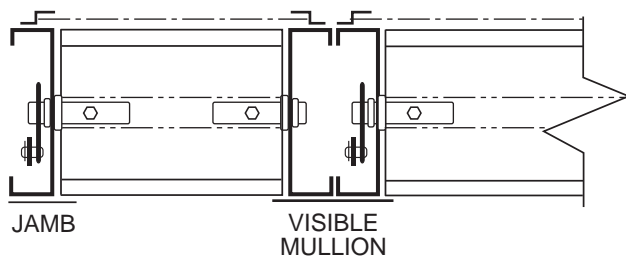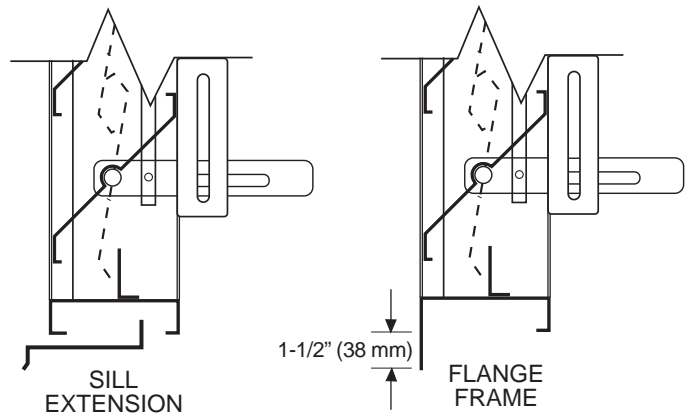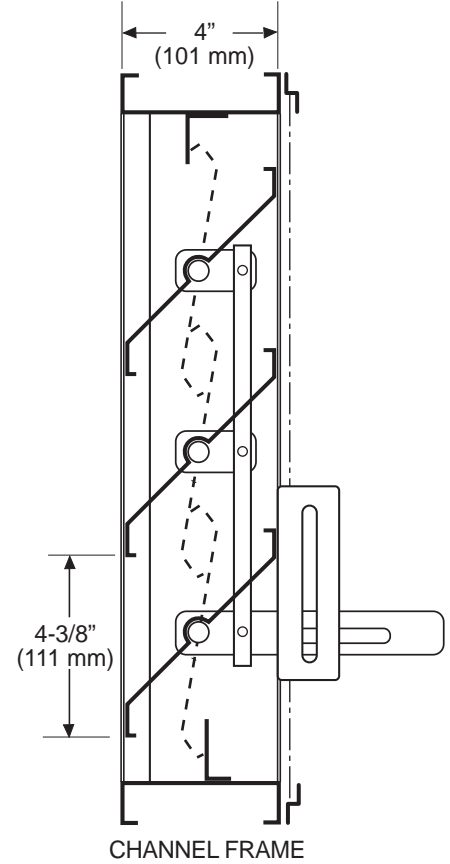

ASLJ4 - 7-00

Specifications are correct at time of printing. However, as part of our 'continuous improvement program,' we reserve the right to make further improvements without notice.

© JULY, 2000 NCA Manufacturing

Project:

Contractor:

Location:

Address:

Architect:

P.O. Number:

Engineer:

Date: