

**Tag:** \_\_\_\_\_ **Engineer:** \_\_\_\_\_  
**Project:** \_\_\_\_\_ **Contractor:** \_\_\_\_\_  
**Location:** \_\_\_\_\_ **Architect:** \_\_\_\_\_  
**Date:** \_\_\_\_\_ **Submitted By:** \_\_\_\_\_



# MODEL XAD-6-GL Extruded Stationary Louver

Drainable Blade, AMCA Licensed

## Standard Construction

**FRAME:** 6" (102) x .125 (3.1) extruded aluminum, 6063-T6

**BLADES:** .081 (2.1) extruded aluminum, 6063-T6  
Drainable Blades fixed at 37.5° angle,  
Spaced approximately 5" (127)

**SCREEN:** Bird screen - 3/4" (19) x .050" (1.3) expanded,  
flattened aluminum with a removable frame on the  
interior of the louver. Screen adds approximately  
1/2" (12.7) to depth of louver.


**FINISH:** Mill

**MINIMUM SIZE:** 6"w (152) x 12"h (305)  
**MAXIMUM**

**ASSEMBLY SIZE:** Single Sections will not exceed 96"w (2438) x  
90"h (2286) or 90"w (2286) x 96"h (2438). Larger  
sizes will require field assembly of smaller sections.

**DESIGN LOAD:** 20 psf (97.6 kg/m<sup>2</sup>) Consult for higher pressures.

All dimensions shown in inches, parenthesis ( ) indicate millimeters.

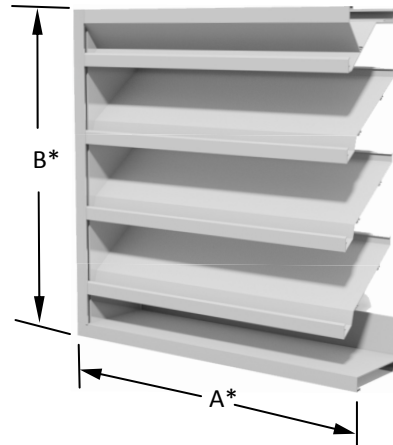

## LEED Material Information

**VOC Content (g/L) - 0**

**Manufacturing Location (MR 5.1)**


- Marion, NC 28752

**Recycled Content (MR 4.1 & 4.2)**

- 10% Post-Consumer
- 80% Pre-Consumer

\* Width [A dimension] and Height [B dimension] are approximately 1/4" (6) under listed size, unless otherwise specified.

## Frame Options

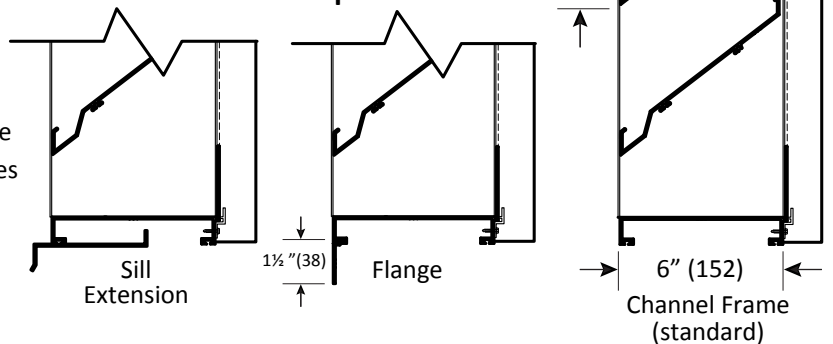


**Note:** Blade supports may be added as necessary. Blade supports will increase overall depth of louver; exact amount is dependent upon louver size, assembly configuration or windload requirements.

## Optional Construction

- .125" (3.2) extruded aluminum frame
- .125" (3.2) extruded aluminum blades
- Sill Extension
- Flange Frame [1 1/2" (38)]
- Sub-Frame
- Hinged Sub-Frame
- Welded Construction
- Filter Racks
- Security Bars:
  - Front
  - Rear
- Optional Bird and Insect Screens
- Optional Finishes: Consult Finishes Chart
- Blank Off Panel:
  - Aluminum, Non-Insulated
  - Aluminum, Insulated

Consult NCA for Other Special Requirements

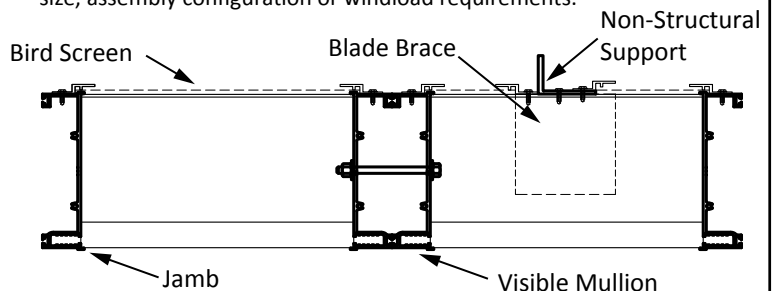

**Note:** Concealed (Architectural) mullions are not recommended with drainable blade products.

XAD-6-GL - 0613 / Replaces XAD-6-GL-0205

All Stated Specifications Are Subject to Change Without notice or Obligation.




# PERFORMANCE DATA

## FREE AREA GUIDE FOR XAD-6-GL (Free area in ft<sup>2</sup> and m<sup>2</sup>)

		Width in Inches (Meters)																		
		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
Height in Inches (Meters)	12 0.30	0.17 0.02	0.27 0.03	0.38 0.04	0.48 0.04	0.59 0.05	0.69 0.06	0.79 0.07	0.90 0.08	1.00 0.09	1.11 0.10	1.21 0.11	1.31 0.12	1.42 0.13	1.52 0.14	1.63 0.15	1.73 0.16	1.83 0.17	1.94 0.18	2.04 0.19
	18 0.46	0.44 0.04	0.71 0.07	0.98 0.09	1.25 0.12	1.52 0.14	1.78 0.17	2.05 0.19	2.32 0.22	2.59 0.24	2.86 0.27	3.13 0.29	3.40 0.32	3.67 0.34	3.94 0.37	4.21 0.39	4.47 0.42	4.74 0.44	5.01 0.47	5.28 0.49
	24 0.61	0.71 0.07	1.14 0.11	1.58 0.15	2.01 0.19	2.45 0.23	2.88 0.27	3.31 0.31	3.75 0.35	4.18 0.39	4.62 0.43	5.05 0.47	5.48 0.51	5.92 0.55	6.35 0.59	6.78 0.63	7.22 0.67	7.65 0.71	8.09 0.75	8.52 0.79
	30 0.76	0.98 0.09	1.58 0.15	2.18 0.20	2.78 0.26	3.38 0.31	3.97 0.37	4.57 0.43	5.17 0.48	5.77 0.54	6.37 0.59	6.97 0.65	7.57 0.70	8.17 0.76	8.77 0.82	9.36 0.87	9.96 0.93	10.56 0.98	11.16 1.04	11.76 1.09
	36 0.91	1.25 0.12	2.01 0.19	2.78 0.26	3.54 0.33	4.31 0.40	5.07 0.47	5.83 0.54	6.60 0.61	7.36 0.68	8.12 0.76	8.89 0.83	9.65 0.90	10.42 0.97	11.18 1.04	11.94 1.11	12.71 1.18	13.47 1.25	14.24 1.32	15.00 1.39
	42 1.07	1.52 0.14	2.45 0.23	3.38 0.31	4.31 0.40	5.24 0.49	6.16 0.57	7.09 0.66	8.02 0.75	8.95 0.83	9.88 0.92	10.81 1.01	11.74 1.09	12.67 1.18	13.59 1.26	14.52 1.35	15.45 1.44	16.38 1.52	17.31 1.61	18.24 1.70
	48 1.22	1.89 0.18	3.04 0.28	4.20 0.39	5.35 0.50	6.50 0.60	7.66 0.71	8.81 0.82	9.96 0.93	11.12 1.03	12.27 1.14	13.43 1.25	14.58 1.36	15.73 1.46	16.89 1.57	18.04 1.68	19.19 1.79	20.35 1.89	21.50 2.00	22.65 2.11
	54 1.37	2.16 0.20	3.48 0.32	4.80 0.45	6.11 0.57	7.43 0.69	8.75 0.81	10.07 0.94	11.39 1.06	12.71 1.18	14.03 1.30	15.34 1.43	16.66 1.55	17.98 1.67	19.30 1.79	20.62 1.92	21.94 2.04	23.26 2.16	24.58 2.29	25.89 2.41
	60 1.52	2.43 0.23	3.91 0.36	5.40 0.50	6.88 0.64	8.36 0.78	9.85 0.92	11.33 1.05	12.81 1.19	14.30 1.33	15.78 1.47	17.26 1.61	18.75 1.74	20.23 1.88	21.72 2.02	23.20 2.16	24.68 2.30	26.17 2.43	27.65 2.57	29.13 2.71
	66 1.68	2.70 0.25	4.35 0.40	6.00 0.56	7.64 0.71	9.29 0.86	10.94 1.02	12.59 1.17	14.24 1.32	15.89 1.48	17.54 1.63	19.18 1.78	20.83 1.92	22.48 2.09	24.13 2.24	25.78 2.40	27.43 2.55	29.08 2.70	30.72 2.86	32.37 3.01
	72 1.83	2.97 0.28	4.78 0.44	6.60 0.61	8.41 0.78	10.22 0.95	12.04 1.12	13.85 1.29	15.66 1.46	17.48 1.63	19.29 1.79	21.10 1.96	22.92 2.13	24.73 2.30	26.54 2.47	28.36 2.64	30.17 2.81	31.98 2.97	33.80 3.14	35.61 3.31
	78 1.98	3.24 0.30	5.22 0.49	7.20 0.67	9.17 0.85	11.15 1.04	13.13 1.22	15.11 1.41	17.09 1.59	19.07 1.77	21.04 1.96	23.02 2.14	25.00 2.33	26.98 2.51	28.96 2.69	30.94 2.88	32.92 3.06	34.89 3.25	36.87 3.43	38.85 3.61
	84 2.13	3.51 0.33	5.65 0.53	7.79 0.72	9.94 0.92	12.08 1.12	14.23 1.32	16.37 1.52	18.51 1.72	20.66 1.92	22.80 2.12	24.94 2.32	27.09 2.52	29.23 2.72	31.37 2.92	33.52 3.12	35.66 3.32	37.80 3.52	39.95 3.72	42.09 3.91
	90 2.29	3.78 0.35	6.09 0.57	8.39 0.78	10.70 1.00	13.01 1.21	15.32 1.42	17.63 1.64	19.94 1.85	22.25 2.07	24.55 2.28	26.86 2.50	29.17 2.71	31.48 2.93	33.79 3.14	36.10 3.36	38.40 3.57	40.71 3.79	43.02 4.00	45.33 4.22
	96 2.44	4.05 0.38	6.52 0.61	8.99 0.84	11.47 1.07	13.94 1.30	16.41 1.53	18.89 1.76	21.36 1.99	23.83 2.22	26.31 2.45	28.78 2.68	31.26 2.91	33.73 3.14	36.20 3.37	38.68 3.60	41.15 3.83	43.62 4.06	46.10 4.29	48.57 4.52

## PRESSURE DROP

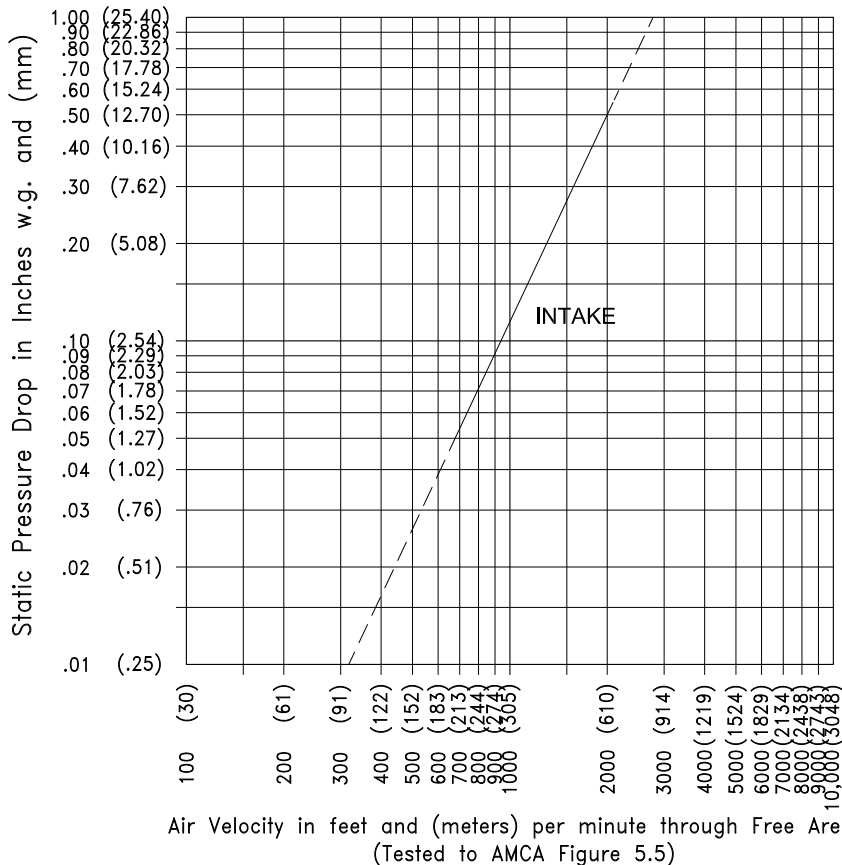

NCA Manufacturing Inc. certifies that the Model XAD-6-GL louver shown herein is certified to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings only.

Beginning Point of Water Penetration at .01oz./ft<sup>2</sup> is **1250+ FPM (381 m/min)** Free Area Velocity.

### Notes:

- Pressure Drop and Water Penetration Data applies to test unit size 48" w x 48" h (1219 x 1219) only.
- Reported Pressure Drop is for Intake only.
- Performance data does not include the effects of bird screen.
- All Performance shown is at standard air density of 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>).
- Water Penetration data is for 15 minute test duration